


The AMTROL® BoilerMate™ Classic Series tanks are perfect for residential applications and are available in 26- and 41-gallon sizes. The Classic Series tanks use a seamless plastic liner that will not crack, chip or peel. This polyethylene reservoir is surrounded by high-density urethane insulation and enclosed in a steel outer shell with a durable, appliance-like finish.

Selecting the right model for your home is easy:
Just count the number of bathrooms and bedrooms you have and look on your boiler for its net output in BTU/HR.

Sizing is based on standard shower head flows (2.5 to 3 gpm). For whirlpool sizing applications, consult your AMTROL representative.

Quick Size Chart

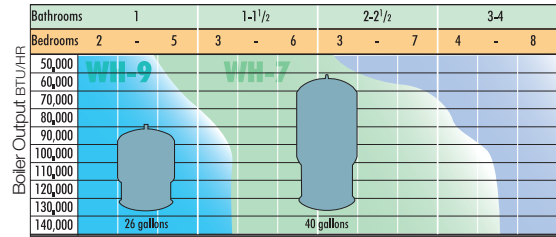

Specifications

Model Number	Capacity (gallons)	Height (inches)	Diameter (inches)	Shipping Weight (lbs.)	Cold Water inlet-nptm	Hot Water outlet-nptf	Boiler Supply	Boiler Return
WH-9	26	36.5	22	90	3/4"	3/4"	3/4" NPTM	3/4" NPTM
WH-7	41	48	22	134	3/4"	3/4"	3/4" NPTM	3/4" NPTM
WH-41	41	48	22	134	3/4"	3/4"	3/4" NPTM	3/4" NPTM
WH-9DW	26	36.5	22	100	3/4"	3/4"	3/4" Union Sweat	3/4" Union Sweat
WH-7DW	41	48	22	144	3/4"	3/4"	3/4" Union Sweat	3/4" Union Sweat
WH-41DW	41	48	22	144	3/4"	3/4"	3/4" Union Sweat	3/4" Union Sweat

Performance

WH-9 Series BoilerMate™ Classic

- 26 Gallons
- Limited lifetime warranty
- Compact design to fit small spaces
- Available models (see option codes):
WH-9L, WH-9Z, WH-9P, WH-9LDW, WH-9ZDW

WH-7 Series BoilerMate™ Classic

- 41 Gallons
- Limited lifetime warranty
- Most popular model
- Recharge 41 gallons in as fast as 12 min.
- Available models (see option codes):
WH-7L, WH-7Z, WH-7P, WH-7LDW, WH-7ZDW

WH-41 Series BoilerMate™ Classic

- 41 Gallons
- Transferable 5-year warranty
- Same construction as WH-7
- Low-cost alternative for new construction, housing projects and retrofit
- Available models (see option codes):
WH-41L, WH-41Z, WH-41LDW, WH-41ZDW

WH-9 SERIES		
BOILER OUTPUT (5 gpm input-to BoilerMate)	1 FIRST-HOUR RATING (90°F rise)	2 CONTINUOUS FLOW (70°F rise steady state)
BTU/HR	GPH	GPH
40,000	75	69
60,000	102	104
80,000	129	139
100,000	156	173
120,000	184	208
140,000	211	242



Available with SmartControl or Standard Dial Aquastat

WH-7, WH-41 SERIES		
BOILER OUTPUT (5 gpm input-to BoilerMate)	1 FIRST-HOUR RATING (90°F rise)	2 CONTINUOUS FLOW (70°F rise steady state)
BTU/HR	GPH	GPH
40,000	89	69
60,000	116	104
80,000	143	139
100,000	170	173
120,000	197	208
140,000	224	242



Available with SmartControl or Standard Dial Aquastat

Option Codes:

- Z = electromechanical thermostat, packaged without circulator
- DW = heat exchanger with double-wall tubing, vented to atmosphere IAPMO listed
- P = SmartControl packaged with circulator & flanges
- L = SmartControl packaged without circulator