



WELL-X-TROL®

Full Acceptance Bladder Well Tanks: WX-420 Series Non-ASME

100 PSIG Working Pressure

Construction


Shell	Steel
Full Acceptance Bladder	Heavy Duty Butyl
Bladder Thickness	.100 In. Minimum
System Connection	Malleable Iron (NPTF)
Finish	Red Oxide Primer
Air Valve	Schrader Valve w/EPDM Seats
Factory Precharge	25 PSIG (1.7 bar)

Performance

Maximum Operating Temperature	240°F (115°C)
Maximum Working Pressure	100 PSIG (6.9 bar)
Warranty	1 Year

Application

- For use in commercial well water and booster pump systems.
- Replaceable bladder design.
- Sight glass and seismic restraint options available.
- Available with S/S system connection.

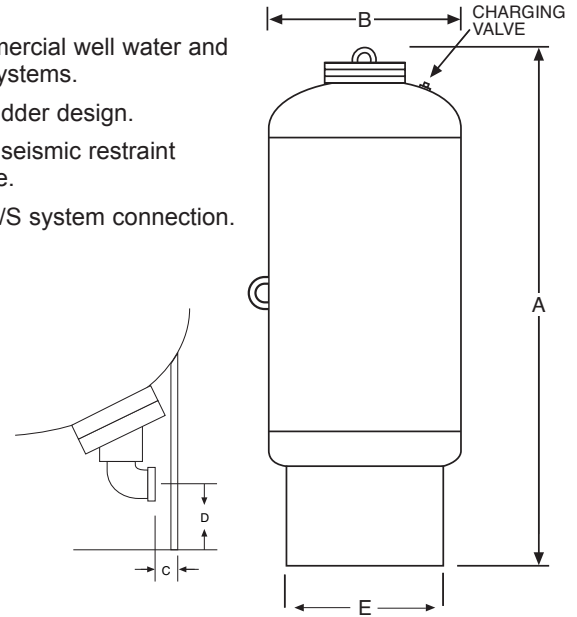

Non-ASME Models

Model Number	Tank Volume		Max. Accept. Volume		A Tank Height		B Tank Diameter		C Sys. Conn. Inset		D Sys. Conn. Centerline		E Stand Diameter		System Conn. (NPTF)	Shipping Weight	
	Gal	Lit	Gal	Lit	In	mm	In	mm	In	mm	In	mm	In	mm		Lbs	Kg
WX-421	158	600	158	600	75	1905	30	762	3¼	83	4¼	108	24	610	2	388	176
WX-422	211	800	211	800	93	2362	30	762	3¼	83	4¼	108	24	610	2	454	206
WX-423	264	1000	264	1000	82	2083	36	914	4½	114	5½	128	30	762	3	506	230
WX-424	317	1200	317	1200	95	2413	36	914	4½	114	5½	128	30	762	3	571	259
WX-426	422	1600	422	1600	82	2083	48	1219	7¾	187	6¾	156	42	1067	3	971	440
WX-427	528	2000	528	2000	96	2438	48	1219	7¾	187	6¾	156	42	1067	3	1222	554

All dimensions and weights are approximate.

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

