



# WELL-X-TROL®

Diaphragm Well Tanks: WX-100, 200 and 300 Series with DuraBase®

**150 PSIG Working Pressure**

## Construction

Shell	High Strength Steel
Diaphragm	Heavy Duty Butyl
Liner	Antimicrobial
System Connection	Stainless Steel
Finish	Tuf-Kote™ HG Blue
Water Circulator	Turbulator™
Air Valve	Projection Welded
Factory Precharge	38 PSIG (2.6 bar)

## Performance


Maximum Operating Temperature	200°F (93°C)
Maximum Working Pressure	150 PSIG (10.3 bar)
Maximum Relief Valve Setting	125 PSIG (8.6 bar)
Warranty	7-Years

## Application

- Controls pump cycling in residential well water systems.
- Can be installed indoors or outdoors.
- DuraBase stand is rugged and will never corrode. Patented.

## Stand Models

Model Number	Tank Volume		Max. Accept. Factor	A Tank Height		B Tank Diameter		C Sys. Conn. Centerline		D Stand Diameter		System Conn. (NPTM)	Shipping Weight	
	Gal	Lit		In	mm	In	mm	In	mm	In	mm		Lbs	Kg
WX-201D	14.0	53	0.81	25	635	15	381	1 <sup>11</sup> / <sub>16</sub>	43	15 <sup>3</sup> / <sub>8</sub>	391	1	25	11
WX-202D	20.0	76	.057	32	813	15	381	1 <sup>11</sup> / <sub>16</sub>	43	15 <sup>3</sup> / <sub>8</sub>	391	1	32	15
WX-202XLD	26.0	98	0.44	39	991	15	381	1 <sup>11</sup> / <sub>16</sub>	43	15 <sup>3</sup> / <sub>8</sub>	391	1	39	18
WX-203D	32.0	121	0.35	47	1194	15	381	1 <sup>11</sup> / <sub>16</sub>	43	15 <sup>3</sup> / <sub>8</sub>	391	1	47	21
WX-205D	34.0	129	1.00	30	762	22	559	2	51	22	559	1 <sup>1</sup> / <sub>4</sub>	57	26
WX-250D	44.0	167	0.77	36	914	22	559	2	51	22	559	1 <sup>1</sup> / <sub>4</sub>	65	29
WX-251D	62.0	235	0.55	47	1194	22	559	2	51	22	559	1 <sup>1</sup> / <sub>4</sub>	87	39
WX-255D	81.0	306	0.41	57	1448	22	559	2	51	22	559	1 <sup>1</sup> / <sub>4</sub>	109	49
WX-302D	86.0	326	0.54	47	1194	26	660	2	51	22	559	1 <sup>1</sup> / <sub>4</sub>	106	48
WX-350D	119.0	450	0.39	62	1575	26	660	2	51	22	559	1 <sup>1</sup> / <sub>4</sub>	146	66

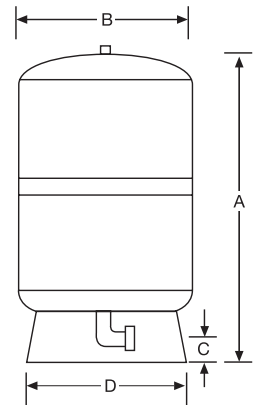

Available in Tan and Gray. Use suffix T or G.

All dimensions and weights are approximate.

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

