


Typical Installation



THERMXTROL

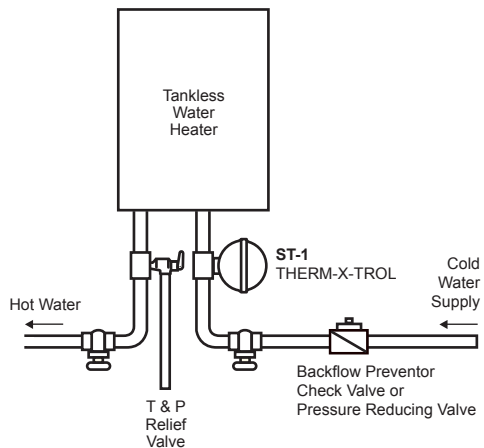

Therm-X-Trol® water heater expansion tanks are made in our ISO 9001: 2015 certified facilities. Models include floor standing, in-line and point-of-use.



See the full line of
Therm-X-Trol® Tanks at amtrol.com



1400 Division Road, West Warwick, RI 02893 USA
T: 800.426.8765 www.amtrol.com



© 2023 Amtrol Inc.
One or more features of this product are covered by U.S. patents,
visit www.amtrol.com/patents for more information.

MC10336 (08/23)

THERMXTROL

AMTROL Composite Thermal Expansion

BIG PROTECTION. COMPACT SIZE.



For Tankless Water Heaters



THERMXTROL

Composite Expansion Tank

The Simple Solution for Tankless Water Heaters.



The Therm-X-Trol ST-1 absorbs thermal expansion and pressure surge in tankless and point-of-use water heaters to protect the heat exchanger. Simple to install, the ST-1 features patented air cell technology and requires no precharge adjustment or maintenance. With a 304 stainless steel waterway and a 7-Year limited warranty, the ST-1 delivers big protection in a compact size.



7-Year Warranty

- Longest warranty in the industry.

Worry-Free Longevity

- Patented technology eliminates sliding parts.
- No pistons or o-rings to wear out.

Patented Air Cell

- Proprietary, sealed design never requires charging.
- Superior pressure surge capacity.
- Entire air cell surface absorbs energy for greater protection.

Advanced Composite Material

- Durable and corrosion proof.
- Impact resistant polymer.

304L Stainless Steel Waterway

- High grade stainless steel waterway to handle the toughest water conditions.

Specifications

Diameter: 3.4"

Height: 4.0"

System Connection: 1/2" NPTM

Maximum Intermittent Temperature: 140°F

Maximum Working Pressure: 150 psig

Shipping Weight: 1 lb.

