



# EXTROL®

Hydronic Expansion Tanks: Vertical AX Series ASME

## 300 PSIG Working Pressure

### Construction




Shell	ASME Approved Steel
Diaphragm	Heavy Duty Butyl/EPDM
System Connection	NPTF <sup>1</sup> Malleable Iron Center NPTF <sup>2</sup> Malleable Iron Bottom NPTM <sup>3</sup> Steel Pipe, Top Offset
Finish	Red Oxide Primer
Air Valve	Schrader Valve w/EPDM Seats
Factory Precharge	12 PSIG (.8 bar)

### Performance

Maximum Operating Temperature	240°F (115°C)
Maximum Working Pressure	300 PSIG (20.7 bar)
Warranty	3-Years

### Application

- For use in closed, non-potable hydronic heating and chilled water systems.
- Designed to meet all ASME Code Section VIII, Division 1 standards.
- Available with optional sight glass and seismic restraints.
- Suitable in propylene glycol applications with mixtures up to 50%.

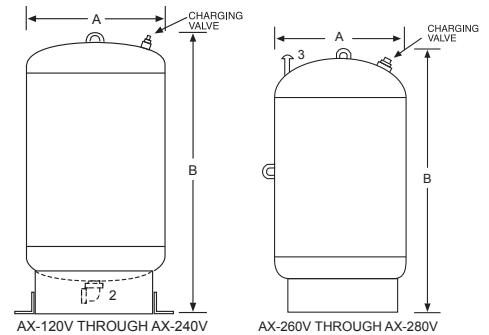

BOTTOM VIEW

### Vertical ASME Models

Model Number	Tank Volume		Max. Accept. Volume		A Tank Diameter		B Tank Height		Sys. Conn	Shipping Weight	
	Gal	Lit	Gal	Lit	In	mm	In	mm		Lbs	Kg
AX-15V	8.0	30.3	2.4	9.1	12	305	20	508	1/2 <sup>1</sup>	62	28
AX-20V	10.9	41.3	2.4	9.1	12	305	27	686	1/2 <sup>1</sup>	75	34
AX-40V	21.7	82.2	11.3	42.8	16	356	30	762	1/2 <sup>1</sup>	122	55
AX-60V	33.6	127.2	11.3	42.8	16	356	45	1143	1/2 <sup>1</sup>	157	71
AX-80V	44.4	168.1	22.6	85.5	24	610	29	737	1 <sup>1</sup>	248	112
AX-100V	55.7	211.8	22.6	85.5	24	610	34	864	1 <sup>1</sup>	282	128
AX-120V	68.0	257.4	34.0	128.7	24	610	47	1194	1 <sup>2</sup>	342	155
AX-144V	77.0	291.5	34.0	128.7	24	610	52	1321	1 <sup>2</sup>	368	167
AX-180V	90.0	340.7	34.0	128.7	24	610	60	1524	1 <sup>2</sup>	434	197
AX-200V	110.0	416.4	34.0	128.7	24	610	66	1676	1 <sup>2</sup>	464	210
AX-240V	132.0	500.0	46.0	174.0	30	762	58	1473	1 <sup>2</sup>	642	291
AX-260V	159.0	600.0	56.0	212.0	30	762	65	1651	1 1/4 <sup>3</sup>	736	334
AX-280V	211.0	800.0	84.0	318.0	30	762	82	2083	1 1/4 <sup>3</sup>	945	429

All dimensions and weights are approximate.

### Optional Seismic Restraints

Tank Diameter	Bolt Circle	Dim. E	Dim. F	Hole Size G
B	D	E	F	G
12	12 3/4	2	2	9/16
16 1/4	14 3/4	2	2	9/16
24	18	2	2	9/16
30	27	3	3	3/4

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

