



WELL-X-TROL®

Diaphragm Well Tanks: WX-100, 200 and 300 Series with DuraBase®

150 PSIG Working Pressure

Construction

| | |
|-------------------|---------------------|
| Shell | High Strength Steel |
| Diaphragm | Heavy Duty Butyl |
| Liner | Antimicrobial |
| System Connection | Stainless Steel |
| Finish | Tuf-Kote™ HG Blue |
| Water Circulator | Turbulator® |
| Air Valve | Projection Welded |
| Factory Precharge | 38 PSIG (2.6 bar) |

Performance


| | |
|-------------------------------|---------------------|
| Maximum Operating Temperature | 200°F (93°C) |
| Maximum Working Pressure | 150 PSIG (10.3 bar) |
| Maximum Relief Valve Setting | 125 PSIG (8.6 bar) |
| Warranty | 7-Years |

Application

- Controls pump cycling in residential well water systems.
- Can be installed indoors or outdoors.
- DuraBase stand is rugged and will never corrode. Patented.

Stand Models

| Model Number | Tank Volume | | Max. Accept. Factor | A Tank Height | | B Tank Diameter | | C Sys. Conn. Centerline | | D Stand Diameter | | System Conn. (NPTF) | Shipping Weight | |
|--------------|-------------|-----|---------------------|---------------|------|-----------------|-----|---------------------------------|----|--------------------------------|-----|-------------------------------|-----------------|----|
| | Gal | Lit | | In | mm | In | mm | In | mm | In | mm | | Lbs | Kg |
| WX-201D | 14.0 | 53 | 0.81 | 25 | 635 | 15 | 381 | 1 ¹¹ / ₁₆ | 43 | 15 ³ / ₈ | 391 | 1 | 25 | 11 |
| WX-202D | 20.0 | 76 | .057 | 32 | 813 | 15 | 381 | 1 ¹¹ / ₁₆ | 43 | 15 ³ / ₈ | 391 | 1 | 32 | 15 |
| WX-202XLD | 26.0 | 98 | 0.44 | 39 | 991 | 15 | 381 | 1 ¹¹ / ₁₆ | 43 | 15 ³ / ₈ | 391 | 1 | 39 | 18 |
| WX-203D | 32.0 | 121 | 0.35 | 47 | 1194 | 15 | 381 | 1 ¹¹ / ₁₆ | 43 | 15 ³ / ₈ | 391 | 1 | 47 | 21 |
| WX-205D | 34.0 | 129 | 1.00 | 30 | 762 | 22 | 559 | 2 | 51 | 22 | 559 | 1 ¹ / ₄ | 57 | 26 |
| WX-250D | 44.0 | 167 | 0.77 | 36 | 914 | 22 | 559 | 2 | 51 | 22 | 559 | 1 ¹ / ₄ | 65 | 29 |
| WX-251D | 62.0 | 235 | 0.55 | 47 | 1194 | 22 | 559 | 2 | 51 | 22 | 559 | 1 ¹ / ₄ | 87 | 39 |
| WX-255D | 81.0 | 306 | 0.41 | 57 | 1448 | 22 | 559 | 2 | 51 | 22 | 559 | 1 ¹ / ₄ | 109 | 49 |
| WX-302D | 86.0 | 326 | 0.54 | 47 | 1194 | 26 | 660 | 2 | 51 | 22 | 559 | 1 ¹ / ₄ | 106 | 48 |
| WX-350D | 119.0 | 450 | 0.39 | 62 | 1575 | 26 | 660 | 2 | 51 | 22 | 559 | 1 ¹ / ₄ | 146 | 66 |

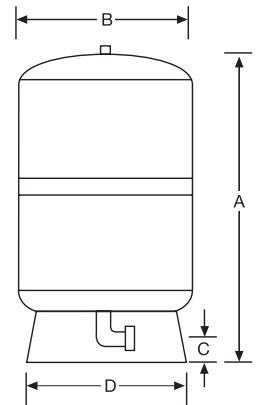

Available in Tan and Gray. Use suffix T or G.

All dimensions and weights are approximate.

| | |
|------------------|-------------|
| Job Name _____ | Notes _____ |
| Engineer _____ | _____ |
| Contractor _____ | _____ |
| P.O. No. _____ | _____ |
| Sales Rep. _____ | _____ |
| Model No. _____ | _____ |

