



# WELL-X-TROL®

Diaphragm Well Tanks: WX-200PA and WX-300PA Series with PRO ACCESS®


**150 PSIG Working Pressure**

## Construction

Shell	High Strength Steel
Diaphragm	Heavy Duty Butyl
Liner	Antimicrobial
System Connection	Stainless Steel NPTF
Finish	Tuf-Kote™ HG Blue
Water Circulator	Turbulator®
Air Valve	Projection Welded
Factory Precharge	38 PSIG (2.6 bar)

## Application

- Controls pump cycling in residential well water systems.
- Can be installed indoors or outdoors.
- PRO ACCESS provides piped to stand convenience for faster installation.

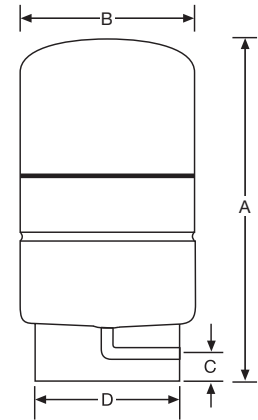

## Performance

Maximum Operating Temperature	200°F (93°C)
Maximum Working Pressure	150 PSIG (10.3 bar)
Maximum Relief Valve Setting	125 PSIG (8.6 bar)
Warranty	7-Years

## Stand Models

Model Number	Tank Volume		Max. Accept. Factor	A Tank Height		B Tank Diameter		C Sys. Conn. Centerline		D Stand Diameter		System Conn. (NPTF)	Shipping Weight	
	Gal	Lit		In	mm	In	mm	In	mm	In	mm		Lbs	Kg
WX-202PA	20.0	76	0.57	32	813	15	381	1 <sup>9</sup> / <sub>32</sub>	40	12	304	1	33	15
WX-202XLPA	26.0	98	0.44	39	991	15	381	1 <sup>9</sup> / <sub>32</sub>	40	12	304	1	40	18
WX-203PA	32.0	121	0.35	47	1194	15	381	1 <sup>9</sup> / <sub>32</sub>	40	12	304	1	48	22
WX-205PA	34.0	129	1.00	30	762	22	559	1 <sup>5</sup> / <sub>16</sub>	49	12	304	1 <sup>1</sup> / <sub>4</sub>	59	27
WX-250PA	44.0	167	0.77	36	914	22	559	1 <sup>5</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	67	30
WX-251PA	62.0	235	0.55	47	1194	22	559	1 <sup>5</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	88	40
WX-255PA	81.0	306	0.41	57	1448	22	559	1 <sup>5</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	111	50
WX-302PA	86.0	326	0.54	47	1194	26	660	2 <sup>1</sup> / <sub>16</sub>	52	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	108	49
WX-350PA	119.0	450	0.39	62	1575	26	660	2 <sup>1</sup> / <sub>16</sub>	52	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	148	67

Available in Tan and Gray. Use suffix T or G.

All dimensions and weights are approximate.

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

