





IDX-SS Models

Construction

Pressure Shell	444 Passivated Stainless Steel
Outer Jacket	Pre-Painted Steel
Insulation	High Density Polyurethane
Heat Exchanger	Top-Mounted Stainless Steel
Finish	Black
Digital Aquastat	LCD Display
Base	Composite

Performance

Model Number	1st Hr Recovery Rating		Continuous Flow Rating		Boiler Flow Rate Recommended (GPM)
	Gal	Lit	Gal	Lit	
IDX-40SS	210	795	197	746	10
IDX-50SS	249	942	229	867	10
IDX-80SS	336	1272	295	1117	14

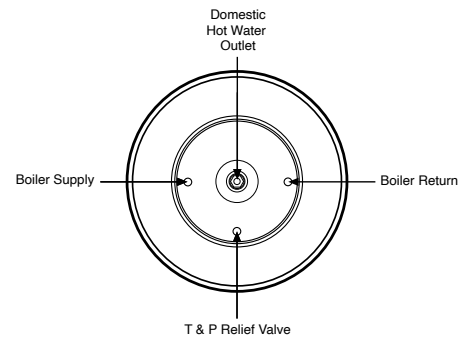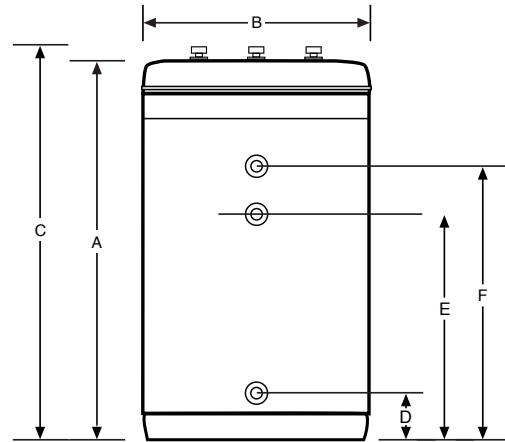

Application

- For use in conjunction with closed loop heating systems to supply domestic hot water.
- Suitable for residential homes.

Warranty: 10-Year Limited Warranty

Models

Model Number	Tank Volume		A Tank Height		B Tank Diameter		C Boiler Supply/Return		D Cold Water In		E Control		F Recirculation		Domestic Water Connections		Boiler Water Connections		Shipping Weight	
	Gal	Lit	In	mm	In	mm	In	mm	In	mm	In	mm	In	mm	Inlet	Outlet	Inlet	Outlet	Lbs	Kg
IDX-40SS	40	151	38.9	988	23	584	38.4	975	4.8	122	21.5	546	N/A	N/A	3/4" NPTF	3/4" NPTF	1" NPTM	1" NPTM	94	43
IDX-50SS	50	189	46.8	1189	23	584	46.3	1176	4.8	122	24.8	630	N/A	N/A	3/4" NPTF	3/4" NPTF	1" NPTM	1" NPTM	123	56
IDX-80SS	80	303	64.3	1633	23	584	63.4	1610	9	229	27	686	44.7	1135	1" NPTF	1" NPTF	1" NPTM	1" NPTM	143	65

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

