



THERMXTROL®

Commercial Thermal Expansion Tanks



3

Years

188

AntiLegionella™



Antimicrobial



Turbulator



DeepDrawn



THERMXTROL®


Amtrol thermal expansion tanks are engineered to control pressure build-up in closed, potable water systems. Available in diaphragm, full acceptance and partial acceptance bladder designs, all Therm-X-Trol expansion tanks are made at our ISO 9001:2015 certified facility. ASME tanks meet Section VIII, Division 1 Standards and have an industry leading 3-year warranty.

Deep Drawn Construction

- Deep drawing doubles dome strength.
- Requires half the welds vs. head & shell.
- Integral diaphragm design features a unique hoop ring and groove configuration that securely locks together the diaphragm, liner and domes.
- Small footprint fits tight mechanical rooms.
- End-mounted charging valve for easy air adjustments on in-line models.



Anti-Legionella Liner

- Safe, Silver-Ion technology targets active microorganisms to neutralize bacteria on contact.
- Compound is molded into the liner.
- Protection lasts the life of the tank.

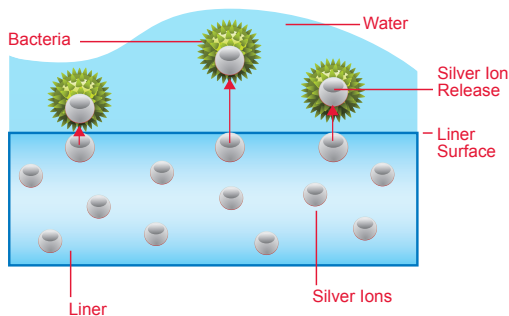


Fresh Water Turbulator®

- Agitates incoming water to remove debris.
- Helps extend the life of the tank.
- Eliminates stagnant water in VFD Systems.

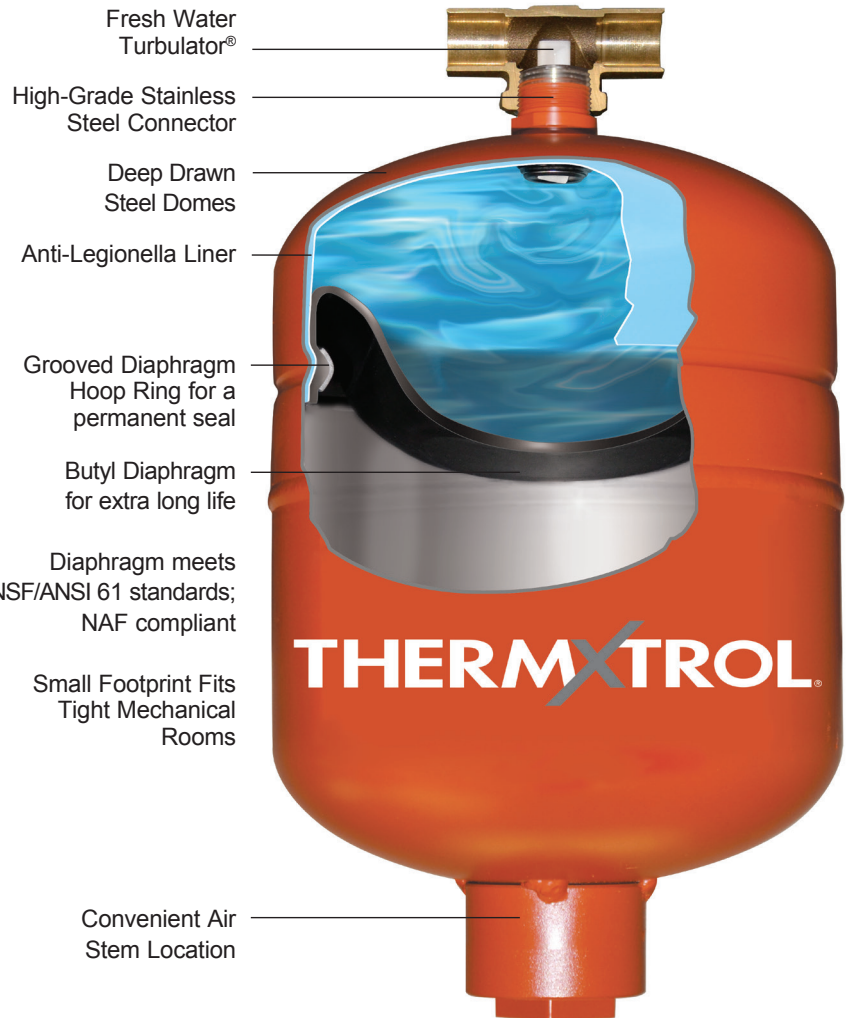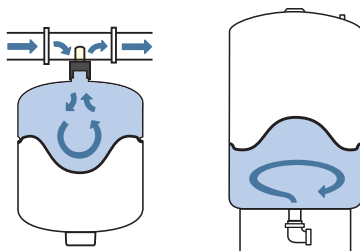

Typical Installation

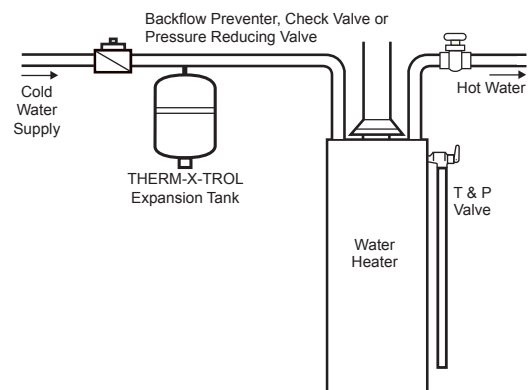


188

AntiLegionella. Antimicrobial. Turbulator.




ASME Thermal Expansion Tanks



ASME Deep Drawn Diaphragm Series Specifications

Model Number	Tank Volume (Gallons)	Max. Accept. Volume (Gallons)	A Diameter (Inches)	B Height (Inches)	System Conn. ¹ (Inches)	Shipping Weight (lbs.) Max. Working Pressure			
						150 PSI	175 PSI	250 PSI	300 PSI
ST-5C-DD	2.0	0.9	8	14	3/4 NPTM	10	12	-	-
ST-12C-DD	6.4	3.2	12	18	3/4 NPTM	17	19	-	-
ST-20VC-DD	8.6	3.2	12	22	3/4 NPTM	36	38	-	-
ST-30VC-DD	16.6	11.3	15	25	3/4 NPTM	48	-	-	-
ST-42VC-DD	23.2	11.3	15	33	3/4 NPTM	68	-	-	-


¹Stainless Steel System Connection. Maximum Operating Temperature: 200°F. Factory Pre-charge: 55 PSIG.

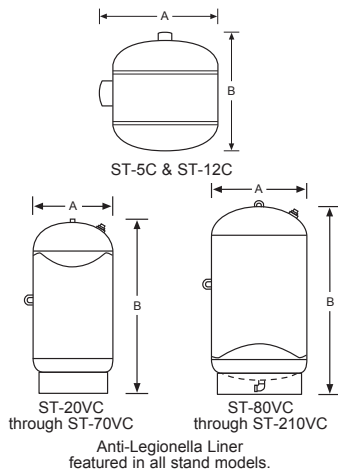

ASME Head & Shell Diaphragm Series Specifications

Model Number	Tank Volume (Gallons)	Max. Accept. Volume (Gallons)	A Diameter (Inches)	B Height (Inches)	System Conn. ¹ (Inches)	Shipping Weight (lbs.) Max. Working Pressure			
						150 PSI	175 PSI	250 PSI	300 PSI
ST-5C	2.1	0.9	10	10	3/4 NPTF	-	-	25	30
ST-12C	6.4	3.2	12	14	3/4 NPTF	-	-	42	50
ST-20VC	8.0	3.2	12	19	3/4 NPTF	-	-	50	62
ST-30VC	14.0	9.0	16	19	3/4 NPTF	-	64	96	108
ST-42VC	18.0	11.0	16	24	3/4 NPTF	-	75	101	112
ST-60VC	25.0	11.0	16	32	3/4 NPTF	85	113	125	139
ST-70VC	34.0	11.0	16	45	3/4 NPTF	99	122	136	151
ST-80VC	53.0	35.0	24	37	1 1/4 NPTF	224	296	305	340
ST-120VC	68.0	35.0	24	44	1 1/4 NPTF	266	340	375	400
ST-180VC	77.0	35.0	24	49	1 1/4 NPTF	285	360	380	420
ST-210VC	90.0	35.0	24	57	1 1/4 NPTF	319	380	405	440


¹Stainless Steel System Connection. Maximum Operating Temperature: 200°F. Factory Pre-charge: 55 PSIG.

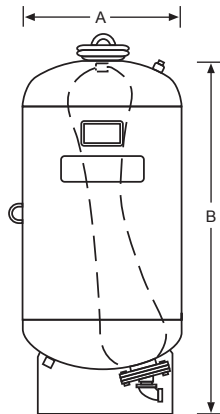

ASME Full Acceptance Bladder Series Specifications

Model Number	Tank Volume (Gallons)	Max. Accept. Volume (Gallons)	A Diameter (Inches)	B Height (Inches)	System Conn. ¹ NPTF (Inches)	Shipping Weight (lbs.) Max. Working Pressure				
						125 PSI	150 PSI	175 PSI	250 PSI	300 PSI
ST-447C	53	53	24	45	2	236	262	290	370	425
ST-448C	80	80	24	59	2	274	340	430	492	540
ST-449C	106	106	24	73	2	320	360	450	510	560
ST-450C	132	132	24	87	2	354	400	460	570	632
ST-451C	158	158	30	73	2	494	587	680	815	895
ST-452C	211	211	30	91	2	593	625	699	1,005	1,107
ST-453C	264	264	36	86	3	667	760	845	1,100	1,205
ST-454C	317	317	36	98	3	762	850	960	1,265	1,400
ST-455C	370	370	36	110	3	842	935	1,065	1,350	1,490
ST-456C	422	422	48	82	3	1,152	1,423	1,650	1,660	1,830
ST-457C	528	528	48	97	3	1,335	1,505	1,875	2,230	2,455

¹Bronze System Connection. Maximum Operating Temperature: 240°F. Factory Pre-charge: 25 PSIG.



ASME Partial Acceptance Bladder Series Specifications

Model Number	Tank Volume (Gallons)	Max. Accept. Volume (Gallons)	A Diameter (Inches)	B Height (Inches)	System Conn. ¹ NPTF (Inches)	Shipping Weight (lbs.) Max. Working Pressure	
						150 PSI	
ST-35CL	10	10	10	37	1		76
ST-50CL	13	11	12	37	1		78
ST-85CL	22	11	16	35	1		95
ST-100CL	26	11	16	39	1		102
ST-130CL	34	27	20	35	1		134
ST-165CL	44	27	20	40	1		153
ST-200CL	53	27	24	41	1		205
ST-300CL	80	27	24	56	1		254
ST-400CL	106	53	24	69	1		308
ST-500CL	132	53	24	83	1		352
ST-600CL	158	53	30	67	1		442

¹Stainless Steel System Connection. Maximum Operating Temperature: 240°F. Factory Pre-charge: 25 PSIG.

Visit amtrol.com for sizing information.



Head & Shell Construction Tanks




Diaphragm Models

ST-60VC through ST-210VC

- Head and shell design with internal diaphragm tank(s).
- Anti-Legionella liner neutralizes bacteria on contact.
- Tested to JIS Z 2801 for reduction of Legionella, staphylococcus and E. coli.
- Follows ASHRAE 188 Anti-Legionella guidelines.
- Diaphragm meets NSF/ANSI 61 standards; NAF compliant.

Typical Installation

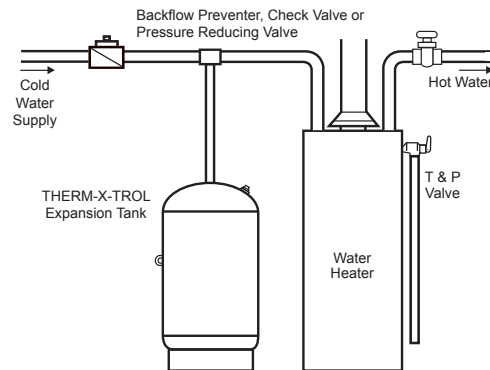


Bladder Models

ST-440/450 & ST-CL/L Series

- Industry's thickest butyl bladder.
- Replaceable bladder avoids costly tank replacement.
- Full and partial acceptance models available.
- Full acceptance bladder meets NSF/ANSI 61 standards; NAF compliant.

Typical Installation

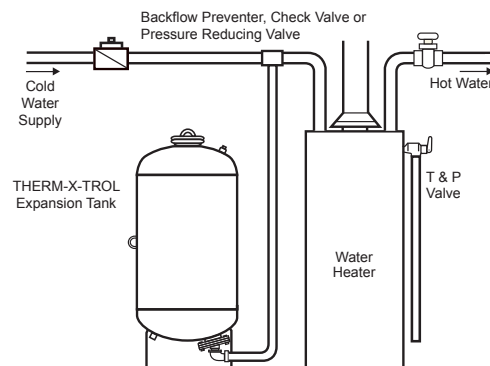

3
Years



1400 Division Road, West Warwick, RI 02893 USA
T: 800.426.8765 www.amtrol.com

