



# THERM-X-TROL®

Thermal Expansion: Full Acceptance Bladder ST-440C and ST-450C Series ASME

**250 PSIG Working Pressure**

## Construction


Shell	Steel
Bladder Material	Heavy Duty Butyl NSF/ANSI 61
Bladder Thickness	.100 In Minimum
System Connection	Bronze
Finish	Red Oxide Primer
Air Valve	Schrader Valve w/ EPDM Seat
Factory Precharge	25 PSIG (1.7 bar)

## Performance

Maximum Operating Temperature	240°F (115°C)
Maximum Working Pressure	250 PSIG (17.2 bar)
Warranty	1-Year

## Application

- For use in closed, potable water systems to control pressure build-up.
- Full acceptance replaceable bladder design.
- Optional sight glass and seismic restraints available.
- Designed and constructed per ASME Code Section VIII, Division 1.

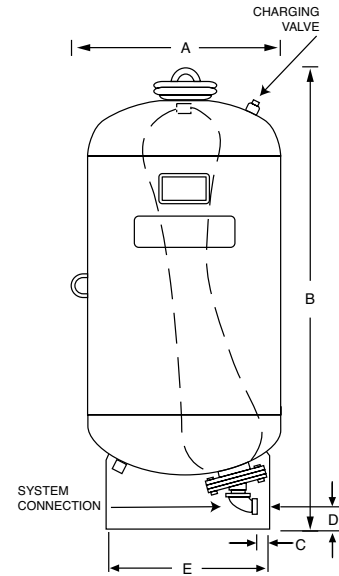

## ASME Models

Model Number	Tank Volume		Max. Accept. Factor	A Tank Diameter		B Tank Height		C System Conn. Height		D Conn. Centerline		E Stand Diameter		System Conn. (NPTF)	Shipping Weight	
	Gal	Lit		In	mm	In	mm	In	mm	In	mm	In	mm		Lbs	Kg
ST-447C	53	200	1.0	24	610	45	1143	2	51	3¾	95	19	483	2	370	168
ST-448C	80	300	1.0	24	610	59	1498	2	51	3¾	95	19	483	2	492	223
ST-449C	106	400	1.0	24	610	73	1854	2	51	3¾	95	19	483	2	510	231
ST-450C	132	500	1.0	24	610	87	2210	2	51	3¾	95	19	483	2	570	259
ST-451C	158	600	1.0	30	762	73	1854	3½	89	5½	140	24	610	2	815	370
ST-452C	211	800	1.0	30	762	91	2311	3½	89	5½	140	24	610	2	1005	456
ST-453C	264	1000	1.0	36	914	86	2184	4½	114	7	178	30	762	3	1100	499
ST-454C	317	1200	1.0	36	914	98	2438	4½	114	7	178	30	762	3	1265	574
ST-455C	370	1400	1.0	36	914	110	2794	4½	114	7	178	30	762	3	1350	612
ST-456C	422	1600	1.0	48	1219	82	2083	7½	191	7⅞	178	42	1067	3	1660	753
ST-457C	528	2000	1.0	48	1219	97	2464	7½	191	7⅞	178	42	1067	3	2230	1012

All dimensions and weights are approximate.

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

